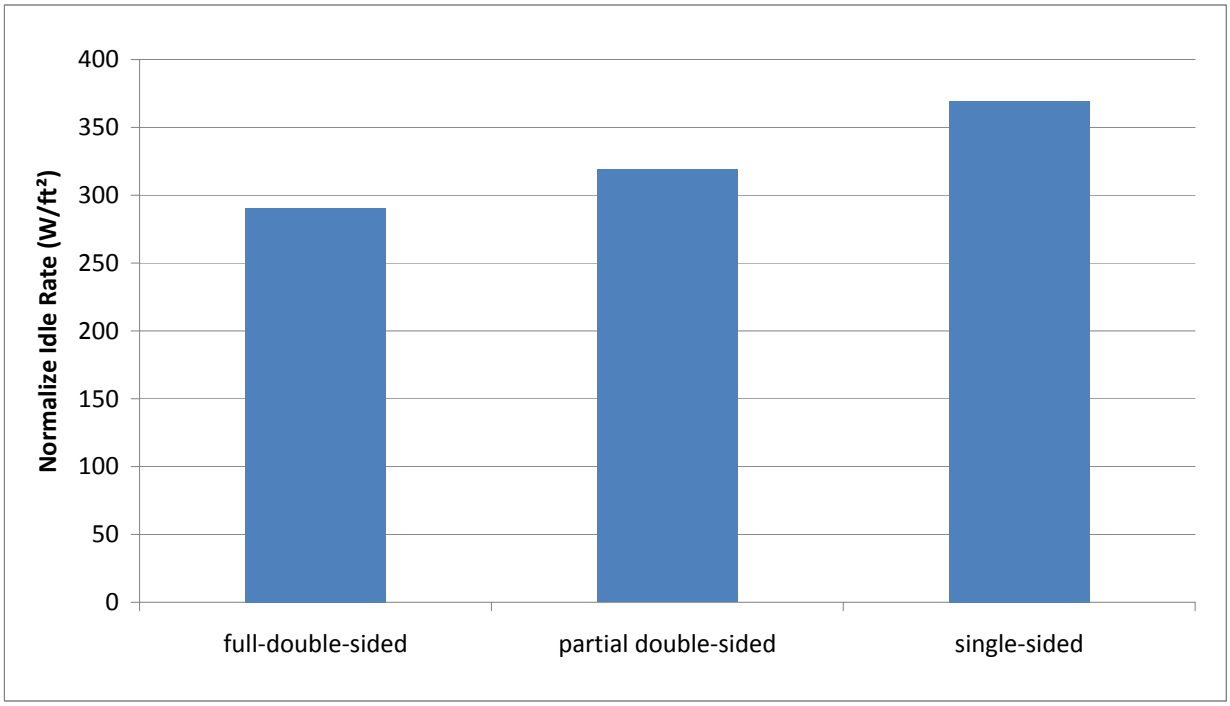
Normalize Idle Rate (W/ft²)
400
350
300
250
200
150
100
50
0
full-double-sided
partial double-sided
single-sided