



ENERGY STAR Single-Family New Homes National Program Requirements

National Program Requirements ENERGY STAR Certified Homes, Version 3.1 (Rev. 11/10)

Eligibility Requirements

The following site-built or modular ¹ homes are eligible to earn the ENERGY STAR:

- ~~Detached dwelling units~~ Dwellings ² (e.g., single-family homes, duplexes); ~~OR~~
- Townhouses ³
- ~~Dwelling units~~ ² in any multifamily building with 4 units or fewer; ~~OR~~
- ~~Dwelling units~~ ² in multifamily buildings with 3 stories or fewer above-grade ^{3,4}; ~~OR~~
- ~~Dwelling units~~ ² in multifamily buildings with 4 or 5 stories above-grade ^{3,4} where dwelling units occupy 80% or more of the occupiable ⁴ square footage of the building ⁵. When evaluating mixed-use buildings for eligibility, exclude commercial / retail space when assessing whether the 80% threshold has been met.

Dwelling Units in certain low-rise multifamily buildings are also eligible to earn the ENERGY STAR through this program if permitted prior to July 1, 2021. See Footnote 4 for details. ⁴

For information about other ENERGY STAR residential new construction programs, visit www.energystar.gov/newhomesrequirements.

Note that compliance with these requirements is not intended to imply compliance with all local code requirements ~~that may be applicable to the home to be built.~~ ^{5,6}

Partnership, Training, and Credentialing Requirements

The following requirements must be met prior to certifying homes:

- Builders are required to sign an ENERGY STAR Partnership Agreement and complete the online Version 3 Builder Orientation, which can be found at www.energystar.gov/homesPA.
- HVAC installing contractors are required to be credentialed by an EPA-recognized HVAC Quality Installation Training and Oversight Organization (H-QUITO) for homes certified using Path B Track B in Exhibit 2. An explanation of this process can be found at www.energystar.gov/newhomesHVAC.
- Energy Rating Companies (e.g., rater companies and Providers ^{6,7}) are required to sign an ENERGY STAR Partnership Agreement, which can be found at www.energystar.gov/homesPA, and Raters ^{7,8} are required to complete EPA-recognized training, which can be found at www.energystar.gov/newhomestraining.

ENERGY STAR Certification Process

1. The certification process provides flexibility to select a custom combination of measures for each home that is equivalent in performance to the minimum requirements of the ENERGY STAR Reference Design Home, Exhibit 1, as assessed through energy modeling. An EPA-recognized ~~Verification Oversight Organization (VOO)~~ Home Certification Organization (HCO)'s Approved Software Rating Tool shall automatically determine the ENERGY STAR ERI Target, which is the highest ERI value that each rated home may achieve to earn the ENERGY STAR. ^{8,9,9}
2. Using the same software program, configure the preferred set of efficiency measures for the home to be certified and verify that the resulting ERI meets or exceeds the ENERGY STAR ERI Target, as determined in Step 1.
Note that, regardless of the measures selected, the Mandatory Requirements for All Certified Homes in Exhibit 2 are also required and impose certain constraints on the efficiency measures selected (e.g., insulation levels, insulation installation quality, window performance, duct leakage). Furthermore, on-site power generation may not be used to meet the ENERGY STAR ERI Target.
3. Construct the home using the measures selected in Step 2 and the Mandatory Requirements for All Certified Homes, Exhibit 2.
4. Using a Rater, verify that all requirements have been met in accordance with the Mandatory Requirements for All Certified Homes and with the ~~on-site~~ inspection procedures for minimum rated features in ANSI / RESNET / ICC Standard 301, Appendix B of an EPA-recognized VOO. ^{7,8,10} For modular homes, a Rater must verify any requirement in the plant not able to be verified on-site because a feature will be concealed prior to shipment. Finally, submit the home to the HCO for final certification and follow the HCO's certification and oversight procedures (e.g., quality assurance, recordkeeping, and reporting) ~~register the rated home with the same EPA-recognized VOO~~. The Rater is required to keep electronic or hard copies of the completed and signed National Rater checklists and the National HVAC Design Report.

The Rater must review all items on the National Rater checklists. Raters are expected to use their experience and discretion to verify that the overall intent of each inspection checklist item has been met (i.e., identifying major defects that undermine the intent of the checklist item versus identifying minor defects that the Rater may deem acceptable).

In the event that a Rater finds an item that is inconsistent with the intent of the checklists, the home cannot earn the ENERGY STAR until the item is corrected. If correction of the item is not possible, the home cannot earn the ENERGY STAR. In the event that an item on a National Rater checklist cannot be inspected by the Rater, the home also cannot earn the ENERGY STAR. The only exceptions to this rule are in the Thermal Enclosure System Section of the National Rater Field Checklist, where the builder may assume responsibility for verifying a maximum of eight items. This option shall only be used at the discretion of the Rater. When exercised, the builder's responsibility will be formally acknowledged by the builder signing the checklist for the item(s) that they verified.

In the event that a Rater is not able to determine whether an item is consistent with the intent (e.g., an alternative method of meeting a checklist requirement has been proposed), then the Rater shall consult their Provider. If the Provider also cannot make this determination, then the Rater or Provider shall report the issue to EPA prior to project completion at: energystarhomes@energystar.gov and will receive



ENERGY STAR Single-Family New Homes~~National Program~~ Requirements

National Program Requirements~~ENERGY STAR Certified Homes,~~ Version 3.1 (Rev. 11/10)

an initial response within 5 business days. If EPA believes the current program requirements are sufficiently clear to determine whether the intent has been met, then this guidance will be provided to the partner and enforced beginning with the house in question. In contrast, if EPA believes the program requirements require revisions to make the intent clear, then this guidance will be provided to the partner but only enforced for homes permitted after a specified transition period after the release of the revised program requirements, typically 60 days in length.

This will allow EPA to make formal policy decisions as partner questions arise and to disseminate these policy decisions through the [Policy Record](#) and the periodic release of revised program documents to ensure consistent application of the program requirements.



ENERGY STAR Single-Family New Homes National Program Requirements

National Program Requirements ENERGY STAR Certified Homes, Version 3.1 (Rev. 11/10)

Exhibit 1: ENERGY STAR Reference Design Home ¹¹

The ENERGY STAR Reference Design Home is the set of efficiency features modeled to determine the ENERGY STAR ERI Target for each home pursuing certification. Therefore, while the features below are not mandatory, if they are not used then other measures will be needed to achieve the ENERGY STAR ERI Target. In addition, note that the Mandatory Requirements for All Certified Homes, Exhibit 2, contain additional requirements such as total duct leakage limits, minimum allowed insulation levels, and minimum allowed fenestration performance. Therefore, EPA recommends that partners review the documents in Exhibit 2 prior to selecting measures.

| Hot Climates (2009 IECC Zones 1,2,3) ¹² | Mixed and Cold Climates (2009 IECC Zones 4,5,6,7,8) ¹² | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|------------------|---|---------------------|----------------------------|------------------|------------------|------------------|------------------|---------------------|--------------|------------------|------------------|------------------|--------------------|------------------|------------------|---------------|------------------|------------------|------------------|------------------|---|------------------|
| Cooling Equipment (Where Provided) | | | | | | | | | | | | | | | | | | | | | | | | |
| <ul style="list-style-type: none"> Cooling equipment modeled at the applicable efficiency levels below: | | | | | | | | | | | | | | | | | | | | | | | | |
| <ul style="list-style-type: none"> 15 SEER / 12 EER AC, Heat pump (See Heating Equipment) | <ul style="list-style-type: none"> 13 SEER AC, Heat pump (See Heating Equipment) | | | | | | | | | | | | | | | | | | | | | | | |
| Heating Equipment | | | | | | | | | | | | | | | | | | | | | | | | |
| <ul style="list-style-type: none"> Heating equipment modeled at the applicable efficiency levels below, dependent on fuel and system type: | | | | | | | | | | | | | | | | | | | | | | | | |
| <ul style="list-style-type: none"> 80 AFUE gas furnace, 80 AFUE oil furnace, 80 AFUE boiler, 8.2 HSPF / 15 SEER / 12 EER air-source heat pump with electric or dual-fuel backup | <ul style="list-style-type: none"> 95 AFUE ENERGY STAR gas furnace, 85 AFUE ENERGY STAR oil furnace, 90 AFUE ENERGY STAR gas boiler, 86 AFUE ENERGY STAR oil boiler, Heat pump, with efficiency as follows: <ul style="list-style-type: none"> CZ 4: 8.5 HSPF / 15 SEER / 12 EER air-source w/ electric or dual-fuel backup, CZ 5: 9.25 HSPF / 15 SEER / 12 EER air-source w/ electric or dual-fuel backup, CZ 6: 9.5 HSPF / 15 SEER / 12 EER air-source w/ electric or dual-fuel backup, CZ 7-8: 3.6 COP / 17.1 EER ground-source w/ electric or dual-fuel backup | | | | | | | | | | | | | | | | | | | | | | | |
| Envelope, Windows, & Doors | | | | | | | | | | | | | | | | | | | | | | | | |
| <ul style="list-style-type: none"> Insulation levels modeled to 2012 IECC levels and Grade I installation per ANSI / RESNET / ICC Standard 301. Infiltration rates modeled as follows: <table border="1" style="margin-left: 40px;"> <tr> <td style="text-align: center;">4 ACH50 in CZs 1,2</td> <td style="text-align: center;">3 ACH50 in CZs 3,4,5,6,7,8</td> </tr> </table> ENERGY STAR windows and doors modeled, as illustrated below: <table border="1" style="margin-left: 40px;"> <tr> <td>Window U-Value:</td> <td>0.40 in CZs 1,2</td> <td>0.30 in CZ 3</td> <td>0.30 in CZ 4</td> <td>0.27 in CZs 5,6,7,8</td> </tr> <tr> <td>Window SHGC:</td> <td>0.25 in CZs 1,2</td> <td>0.25 in CZ 3</td> <td>0.40 in CZ 4</td> <td>Any in CZs 5,6,7,8</td> </tr> </table> <table border="1" style="margin-left: 40px;"> <tr> <td>Door U-Value:</td> <td>Opaque: 0.17</td> <td>≤½ lite: 0.25</td> <td>>½ lite: 0.30</td> </tr> <tr> <td>Door SHGC:</td> <td>Opaque: Any</td> <td>≤½ lite: 0.25</td> <td>>½ lite: 0.25 in CZs 1,2,3; 0.40 in CZs 4,5,6,7,8</td> </tr> </table> | | | | 4 ACH50 in CZs 1,2 | 3 ACH50 in CZs 3,4,5,6,7,8 | Window U-Value: | 0.40 in CZs 1,2 | 0.30 in CZ 3 | 0.30 in CZ 4 | 0.27 in CZs 5,6,7,8 | Window SHGC: | 0.25 in CZs 1,2 | 0.25 in CZ 3 | 0.40 in CZ 4 | Any in CZs 5,6,7,8 | Door U-Value: | Opaque: 0.17 | ≤½ lite: 0.25 | >½ lite: 0.30 | Door SHGC: | Opaque: Any | ≤½ lite: 0.25 | >½ lite: 0.25 in CZs 1,2,3; 0.40 in CZs 4,5,6,7,8 | |
| 4 ACH50 in CZs 1,2 | 3 ACH50 in CZs 3,4,5,6,7,8 | | | | | | | | | | | | | | | | | | | | | | | |
| Window U-Value: | 0.40 in CZs 1,2 | 0.30 in CZ 3 | 0.30 in CZ 4 | 0.27 in CZs 5,6,7,8 | | | | | | | | | | | | | | | | | | | | |
| Window SHGC: | 0.25 in CZs 1,2 | 0.25 in CZ 3 | 0.40 in CZ 4 | Any in CZs 5,6,7,8 | | | | | | | | | | | | | | | | | | | | |
| Door U-Value: | Opaque: 0.17 | ≤½ lite: 0.25 | >½ lite: 0.30 | | | | | | | | | | | | | | | | | | | | | |
| Door SHGC: | Opaque: Any | ≤½ lite: 0.25 | >½ lite: 0.25 in CZs 1,2,3; 0.40 in CZs 4,5,6,7,8 | | | | | | | | | | | | | | | | | | | | | |
| Water Heater | | | | | | | | | | | | | | | | | | | | | | | | |
| <ul style="list-style-type: none"> DHW equipment modeled with the following efficiency levels as applicable: <table border="1" style="margin-left: 40px;"> <tr> <td>Gas:</td> <td>30 Gal = 0.63 EF</td> <td>40 Gal = 0.61 EF</td> <td>50 Gal = 0.59 EF</td> <td>60 Gal = 0.57 EF</td> <td>70 Gal = 0.55 EF</td> <td>80 Gal = 0.53 EF</td> </tr> <tr> <td>Electric:</td> <td>30 Gal = 0.94 EF</td> <td>40 Gal = 0.93 EF</td> <td>50 Gal = 0.92 EF</td> <td>60 Gal = 0.91 EF</td> <td>70 Gal = 0.90 EF</td> <td>80 Gal = 0.89 EF</td> </tr> <tr> <td>Oil:</td> <td>30 Gal = 0.55 EF</td> <td>40 Gal = 0.53 EF</td> <td>50 Gal = 0.51 EF</td> <td>60 Gal = 0.49 EF</td> <td>70 Gal = 0.47 EF</td> <td>80 Gal = 0.45 EF</td> </tr> </table> | | | | Gas: | 30 Gal = 0.63 EF | 40 Gal = 0.61 EF | 50 Gal = 0.59 EF | 60 Gal = 0.57 EF | 70 Gal = 0.55 EF | 80 Gal = 0.53 EF | Electric: | 30 Gal = 0.94 EF | 40 Gal = 0.93 EF | 50 Gal = 0.92 EF | 60 Gal = 0.91 EF | 70 Gal = 0.90 EF | 80 Gal = 0.89 EF | Oil: | 30 Gal = 0.55 EF | 40 Gal = 0.53 EF | 50 Gal = 0.51 EF | 60 Gal = 0.49 EF | 70 Gal = 0.47 EF | 80 Gal = 0.45 EF |
| Gas: | 30 Gal = 0.63 EF | 40 Gal = 0.61 EF | 50 Gal = 0.59 EF | 60 Gal = 0.57 EF | 70 Gal = 0.55 EF | 80 Gal = 0.53 EF | | | | | | | | | | | | | | | | | | |
| Electric: | 30 Gal = 0.94 EF | 40 Gal = 0.93 EF | 50 Gal = 0.92 EF | 60 Gal = 0.91 EF | 70 Gal = 0.90 EF | 80 Gal = 0.89 EF | | | | | | | | | | | | | | | | | | |
| Oil: | 30 Gal = 0.55 EF | 40 Gal = 0.53 EF | 50 Gal = 0.51 EF | 60 Gal = 0.49 EF | 70 Gal = 0.47 EF | 80 Gal = 0.45 EF | | | | | | | | | | | | | | | | | | |
| Thermostat & Ductwork | | | | | | | | | | | | | | | | | | | | | | | | |
| <ul style="list-style-type: none"> Programmable thermostat modeled. All ducts and air handlers modeled within conditioned space. | | | | | | | | | | | | | | | | | | | | | | | | |
| Lighting & Appliances | | | | | | | | | | | | | | | | | | | | | | | | |
| <ul style="list-style-type: none"> ENERGY STAR refrigerators, dishwashers, and ceiling fans modeled. ENERGY STAR light bulbs modeled in 90% of ANSI / RESNET / ICC Standard 301-defined Qualifying Light Fixture Locations. | | | | | | | | | | | | | | | | | | | | | | | | |



ENERGY STAR Single-Family New Homes National Program

Requirements

National Program Requirements ENERGY STAR Certified Homes, Version 3.1 (Rev. 11/10)

Two ~~paths-tracks~~ are provided for satisfying the mandatory requirements for all certified homes, Exhibit 2. ~~Path-ATrack A~~ - HVAC Grading utilizes ANSI / RESNET / ACCA Std. 310 ¹³, a standard for grading the installation of HVAC systems. ~~Path-BTrack B~~ - HVAC Credential utilizes an HVAC contractor credentialed by an EPA-recognized H-QUITO. Either ~~path-track~~ may be selected, but all requirements within that ~~path-track~~ must be satisfied for the home to be certified.

Exhibit 2: Mandatory Requirements for All Certified Homes

| Party Responsible | Mandatory Requirements |
|--|--|
| Requirements Applicable to Path-ATrack A & B | |
| Rater | <ul style="list-style-type: none"> • Completion of National Rater Design Review Checklist, Version 3 / 3.1 • Completion of National Rater Field Checklist, Version 3 / 3.1 |
| Builder | <ul style="list-style-type: none"> • Completion of National Water Management System Builder Requirements, Version 3 / 3.1 |
| Requirements Only Applicable to Path-ATrack A - HVAC Grading ¹³ | |
| HVAC System Designer | <ul style="list-style-type: none"> • Completion of an HVAC design report compliant with ANSI / RESNET / ACCA Std. 310, plus the ENERGY STAR Supplement. |
| HVAC Installing Contractor | <ul style="list-style-type: none"> • None. While the HVAC contractor plays a critical role in properly installing and commissioning a system, the Rater is the party responsible for assessing its installation quality in accordance with ANSI / RESNET / ACCA Std. 310. |
| Requirements Only Applicable to Path-BTrack B - HVAC Credential | |
| HVAC System Designer | <ul style="list-style-type: none"> • Completion of National HVAC Design Report, Version 3 / 3.1 |
| HVAC Installing Contractor | <ul style="list-style-type: none"> • Completion of National HVAC Commissioning Checklist, Version 3 / 3.1 |



ENERGY STAR Single-Family New Homes National Program Requirements

National Program Requirements ENERGY STAR Certified Homes, Version 3.1 (Rev. 11)

Effective Date

To determine the program Version and Revision that a home is required to be certified under, look up the location and permit date of the home in Exhibit 3. Note that the National Version 3 program requirements are being implemented in states that have not adopted the 2012, 2015, or 2018 IECC, or an equivalent code. Note, as well, that regional program requirements, and associated implementation timelines, have been developed for homes in CA, FL, GU, HI, the Northern Mariana Islands, OR, PR, and WA. The National Version 3 and regional program requirements can be found at www.energystar.gov/newhomesrequirements.

This Exhibit contains all implementation timelines applicable on or after September-January 1, 2016-2019. Implementation timelines applicable prior to this date can be obtained by contacting energystarhomes@energystar.gov.

Exhibit 3: ENERGY STAR Certified Single-Family New Homes Implementation Timeline

| State / Territory | Homes Permitted ¹⁴ On or After This Date Must Meet the Adjacent Version & Revision | Version | Revision ¹⁵ |
|--|--|----------------------------|------------------------|
| AL, AK, AZ, AR, CO, GA, IN, ID, KS, KY, LA, ME, MS, MO, NE, NH, NM, NC, ND, OH, OK, PA, SC, SD, TN, UT, VA, WV, WI, WY | 07-01-2016 | National v3 | Rev. 08 |
| | 01-01-2019 | National v3 | Rev. 09 |
| | 10-01-2020 | National v3 | Rev. 10 |
| CT, DC, DE, IA, IL, MA, MD, MI, MN, MT, NJ, NV, NY, RI, TX, VT | 07-01-2016 | National v3.1 | Rev. 08 |
| | 01-01-2019 | National v3.1 | Rev. 09 |
| | 10-01-2020 | National v3.1 | Rev. 10 |
| | 01-01-2022 | National v3.1 | Rev. 11 |
| NV | 07-01-2016 | National v3 | Rev. 08 |
| | 10-01-2016 | National v3.1 | Rev. 08 |
| | 01-01-2019 | National v3.1 | Rev. 09 |
| | 10-01-2020 | National v3.1 | Rev. 10 |
| MI, NJ | 07-01-2016 | National v3 | Rev. 08 |
| | 04-01-2017 | National v3.1 | Rev. 08 |
| | 01-01-2019 | National v3.1 | Rev. 09 |
| | 10-01-2020 | National v3.1 | Rev. 10 |
| CT, NY | 07-01-2016 | National v3 | Rev. 08 |
| | 10-01-2017 | National v3.1 | Rev. 08 |
| | 01-01-2019 | National v3.1 | Rev. 09 |
| | 10-01-2020 | National v3.1 | Rev. 10 |
| TX | 07-01-2016 | National v3 | Rev. 08 |
| | 07-01-2018 | National v3.1 | Rev. 08 |
| | 01-01-2019 | National v3.1 | Rev. 09 |
| - | 10-01-2020 | National v3.1 | Rev. 10 |
| | 07-01-2016 | National v3.1 | Rev. 08 |
| | 07-01-2018 | Oregon and Washington v3.2 | Rev. 08 |
| WA | 01-01-2019 | Oregon and Washington v3.2 | Rev. 09 |
| | 10-01-2020 | Oregon and Washington v3.2 | Rev. 10 |
| | 07-01-2016 | National v3.1 | Rev. 08 |
| OR | 07-01-2016 | National v3.1 | Rev. 08 |
| | 01-01-2019 | National v3.1 | Rev. 09 |
| | 04-01-2019 | Oregon and Washington v3.2 | Rev. 09 |
| | 10-01-2020 | Oregon and Washington v3.2 | Rev. 10 |



ENERGY STAR Single-Family New Homes National Program Requirements

National Program Requirements ENERGY STAR Certified Homes, Version 3.1 (Rev. 11)

| | | | |
|--------------------|----------------------------|--|-------------------------|
| | 01-01-2022 | Oregon and Washington v3.2 | Rev. 11 |
| PA | 01-01-2019 | National v3 | Rev. 09 |
| | 10-01-2020 | National v3 | Rev. 10 |
| | 04-01-2021 | National v3.1 | Rev. 10 |
| | 01-01-2022 | National v3.1 | Rev. 11 |
| | | | |
| NE | 01-01-2019 | National v3 | Rev. 09 |
| | 10-01-2020 | National v3 | Rev. 10 |
| | 07-01-2021 | National v3.1 | Rev. 10 |
| | 01-01-2022 | National v3.1 | Rev. 11 |
| | | | |

Footnotes:

1. A modular home is a prefabricated home that is made of multiple modules or sections that are manufactured and substantially assembled in a manufacturing plant. These pre-built sections are transported to the building site and constructed by a builder to meet all applicable building codes for site-built homes.
2. A Dwelling unit, as defined by ANSI / RESNET / ICC 301, is any building that contains one or two Dwelling Units used, intended, or designed to be built, used, rented, leased, let or hired out to be occupied, or that are occupied for living purposes. ANSI / RESNET / ICC 301 defines a Dwelling Unit as a single unit providing complete independent living facilities for one or more persons, including permanent provisions for living, sleeping, eating, cooking, and sanitation.
3. A Townhouse, as defined by ANSI / RESNET / ICC 301, is a single-family Dwelling Unit constructed in a group of three or more attached units in which each unit extends from the foundation to roof and with open space on at least two sides. Townhouses are also eligible to earn the ENERGY STAR through the ENERGY STAR Multifamily New Construction Program.
3. Any above-grade story with 20% or more occupiable space, including commercial space, shall be counted towards the total number of stories for the purpose of determining eligibility to participate in the program. The definition of an 'above-grade story' is one for which more than half of the gross surface area of the exterior walls is above-grade. All below-grade stories, regardless of type, shall not be included when evaluating eligibility.
4. If permitted prior to July 1, 2021, the following are also eligible to earn the ENERGY STAR through the ENERGY STAR Single-Family New Homes program:
 - Dwelling units ² in any multifamily building with 4 units or fewer; OR
 - Dwelling units in multifamily buildings with 3 stories or fewer above-grade; OR
 - Dwelling units ² in multifamily buildings with 4 or 5 stories above-grade where dwelling units occupy 80% or more of the occupiable square footage of the building. When evaluating mixed-use buildings for eligibility, exclude commercial / retail space when assessing whether the 80% threshold has been met.

Any above-grade story with 20% or more occupiable space, including commercial space, shall be counted towards the total number of stories for the purpose of determining eligibility to participate in the program. The definition of an 'above-grade story' is one for which more than half of the gross surface area of the exterior walls is above-grade. All below-grade stories, regardless of type, shall not be included when evaluating eligibility.

Per ASHRAE 62.2-2010, occupiable space is any enclosed space inside the pressure boundary and intended for human activities or continual human occupancy, including, but not limited to, areas used for living, sleeping, dining, and cooking, toilets, closets, halls, storage and utility areas, and laundry areas.


4. Per ASHRAE 62.2-2010, occupiable space is any enclosed space inside the pressure boundary and intended for human activities or continual human occupancy, including, but not limited to, areas used for living, sleeping, dining, and cooking, toilets, closets, halls, storage and utility areas, and laundry areas.
5. These units may earn the ENERGY STAR through either the Certified Homes Program, or the Multifamily High Rise (MFHR) or Multifamily New Construction (MFNC) Programs.
- 6.5. While certification will result in compliance with many code requirements, a Rater is not responsible for ensuring that all code requirements have been met prior to certification. For more information about how these program requirements help satisfy code requirements, visit: www.energystar.gov/newhomesguidance. In the event that a code requirement, a manufacturer's installation instructions, or an engineering document conflicts with a requirement of the ENERGY STAR program (e.g., slab insulation is prohibited to allow visual access for termite inspections), then the conflicting requirement within these program requirements shall not be met. Certification shall only be allowed if the Rater has determined that no equivalent option is available that could meet the intent of the conflicting requirement (e.g., switching from exterior to interior slab edge insulation). Note that a home must still meet its ENERGY STAR ERI Target. Therefore, other efficiency measures may be needed to compensate for the omission of the conflicting requirement.
- 7.6. The term 'Provider' refers to an Approved Rating Provider, as defined by ANSI / RESNET / ICC Standard 301, that is approved by an HCO a designee of a VOO such as RESNET.



ENERGY STAR Single-Family New Homes National Program Requirements

National Program Requirements ENERGY STAR Certified Homes, Version 3.1 (Rev. 110)

- 8.7. The term 'Rater' refers to the person(s) completing the third-party verification required for certification. The person(s) shall: a) be a Certified Rater ~~or~~, Approved Inspector, as defined by ANSI / RESNET / ICC Standard 301, or an equivalent designation as determined by ~~an HCO~~ ~~VOO~~ ~~such as RESNET~~; and, b) have attended and successfully completed an EPA-recognized training class. See www.energystar.gov/newhomestraining.
- 8. The software program shall automatically determine (i.e., without relying on a user-configured ENERGY STAR Reference Design) this target for each rated home by following the National ERI Target Procedure, Version 3.1 (Rev. ~~4011~~), available at www.energystar.gov/newhomesrequirements.
- 9. HCOs are independent organizations recognized by EPA to implement an ENERGY STAR certification program for single-family and multifamily homes and apartments using an Energy Rating Index (ERI) compliance path. Learn more and find a current list of HCOs at www.energystar.gov/partner_resources/residential_new/working/other_participants/hco.
- 10. Raters who operate under an ~~HCO with a Sampling Protocol~~ ~~Sampling Provider~~ are permitted to verify the Minimum Rated Features of the home and to verify any Checklist Item designated "Rater Verified" using the ~~VOO~~ ~~HCO~~-approved ~~Sampling Protocol~~ ~~sampling protocol for homes outside California, and the CEC-approved sampling protocol for homes in CA~~. No parties other than Raters are permitted to use sampling. All other items shall be verified for each certified home. For example, no items on the National HVAC Commissioning Checklist are permitted to be verified using a ~~sampling~~ ~~Sampling protocol~~ Protocol.
- 11. Note that the efficiency levels of ENERGY STAR certified products aligned with these product specifications when this Version was first released. These efficiency features form the basis of the ENERGY STAR ERI target, regardless of any subsequent revisions to ENERGY STAR certified product specifications. EPA recommends, but does not require, that current ENERGY STAR products be included in ENERGY STAR homes. For current ENERGY STAR products, visit www.energystar.gov/products.
- 12. The following map illustrates the Climate Zone boundaries as defined by the 2012 IECC Figure R301.1.

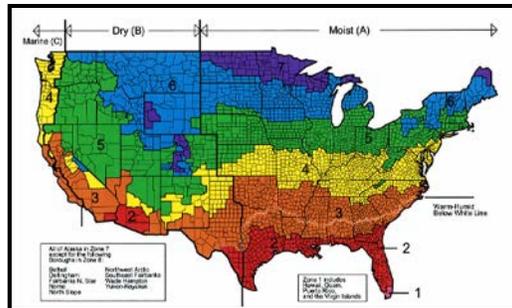

- 13. ~~Path A Track A~~ – HVAC Grading shall not be used until an Effective Date implementation schedule has been defined for ANSI / RESNET / ACCA Std. 310 by the HCO that the home is being certified under RESNET for ANSI / RESNET / ACCA Std. 310. ~~Path A Track A~~ – HVAC Grading shall then use ANSI / RESNET / ACCA Std. 310 including all Addenda and Normative Appendices, with new versions and Addenda implemented according to the schedule defined by the HCO that the home is being certified under ~~Effective Date and Transition Period End Date defined by RESNET. RESNET interpretations of Standard 310 shall also be followed.~~
- 14. The Rater may define the 'permit date' as either the date that the permit was issued or the date of the contract on the home. In cases where permit or contract dates are not available, Providers have discretion to estimate permit dates based on other construction schedule factors. These assumptions should be both defensible and documented.
- 15. Homes certified under Rev. ~~4011~~ of the program requirements are permitted to use either Rev. 08, 09, ~~or~~ 10, or 11 of the National HVAC Design Report.